


### ■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C

### ■ HOUSING

- Material: Nylon 66 UL 94V-0
- Nylon 66 UL 94V-2

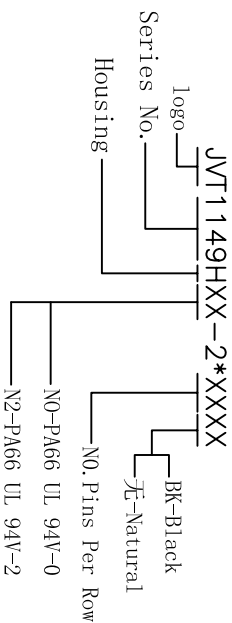

Poles	Dimensions in.(mm)		Poles	Dimensions in.(mm)	
	A	B		A	B
2*1	—	5.40	2*8	29.40	34.9
2*2	4.20	9.70	2*9	33.60	39.1
2*3	8.40	13.9	2*10	37.80	43.3
2*4	12.60	18.1	2*11	42.00	47.5
2*5	16.80	22.3	2*12	46.20	51.7
2*6	21.00	26.5			
2*7	25.20	30.7			

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

A	B	C	D	E	F	G	H
<b>泰业电子有限公司</b> CHIYAO YE CONNECTORS CO.,LTD							
版本	变更内容	日期	单位	比例	日期	核准	审核
			mm	1:1	2013-07-12	bo11y	设计
						许向毅	品名
							料号
							JVT1149HXX-2*XXXXX
							MX4.2mm Dual Row Male HSG
							044
							版本
							A